?? ME Pro ???? SSH ??

?? ME Pro ??????? `openssh-server` ????? SSH?????????? `disabled` ?????????????????????????? SSH ?????

????

1. ????? openssh-server

?????????????

```
dpkg -l openssh-server | tail -1
```

??? `ii` ???????????

```
ii  openssh-server  1:10.0p1-7.lnd.1  loong64  secure shell (SSH) server, for secure access from
```

???????????????

```
sudo apt-get update
sudo apt-get install -y openssh-server
```

2. ????????

```
systemctl status ssh
```

`Loaded` ???? `ssh.service; disabled; preset: enabled` ? `Active` ???? `inactive (dead)` ?????????????

> ?? `preset: enabled` ??????????????????????



?? SSH

1. ???????

```
sudo systemctl enable --now ssh
```

> ?? `enable` ???????? `--now` ??????????

??????????????????????????

??????? `Created symlink` ????? `ssh.service` ? `multi-user.target.wants` ???????????

2. ??????

```
systemctl is-active ssh
systemctl is-enabled ssh
```

?????? `active` ? `enabled` ???????????????

3. ??????

```
ss -lntp | grep ':22'
```

?? `LISTEN 0.0.0.0:22` ???????????? `127.0.0.1:22` ????????? `ListenAddress` ????????? `/etc/ssh/sshd_config` ?

4. ???? IP

```
ip -4 addr show | grep inet
```

???? IPV4 ???? `192.168.1.139` ?? IP ???????? SSH ????????

```
ME@localhost:~$ sudo systemctl enable --now ssh
[sudo] ME 的密码:
Synchronizing state of ssh.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
Created symlink '/etc/systemd/system/sshd.service' → '/usr/lib/systemd/system/ssh.service'.
Created symlink '/etc/systemd/system/multi-user.target.wants/ssh.service' → '/usr/lib/systemd/system/ssh.service'.
ME@localhost:~$ ss -lntp | grep ':22'
LISTEN 0      128          0.0.0.0:22         0.0.0.0:*
LISTEN 0      128             [::]:22            [::]:*
ME@localhost:~$ ip -4 addr show | grep inet
    inet 127.0.0.1/8 scope host lo
    inet 192.168.1.139/24 brd 192.168.1.255 scope global dynamic noprefixroute wlp2s0
ME@localhost:~$
```

????

1. ???????

?????????????

```
ssh ME@192.168.1.139
```

> “ `ME` ?? IP?

??????? `The authenticity of host ... can't be established` ??? `yes` ???????????????

2. ????

```
exit
```

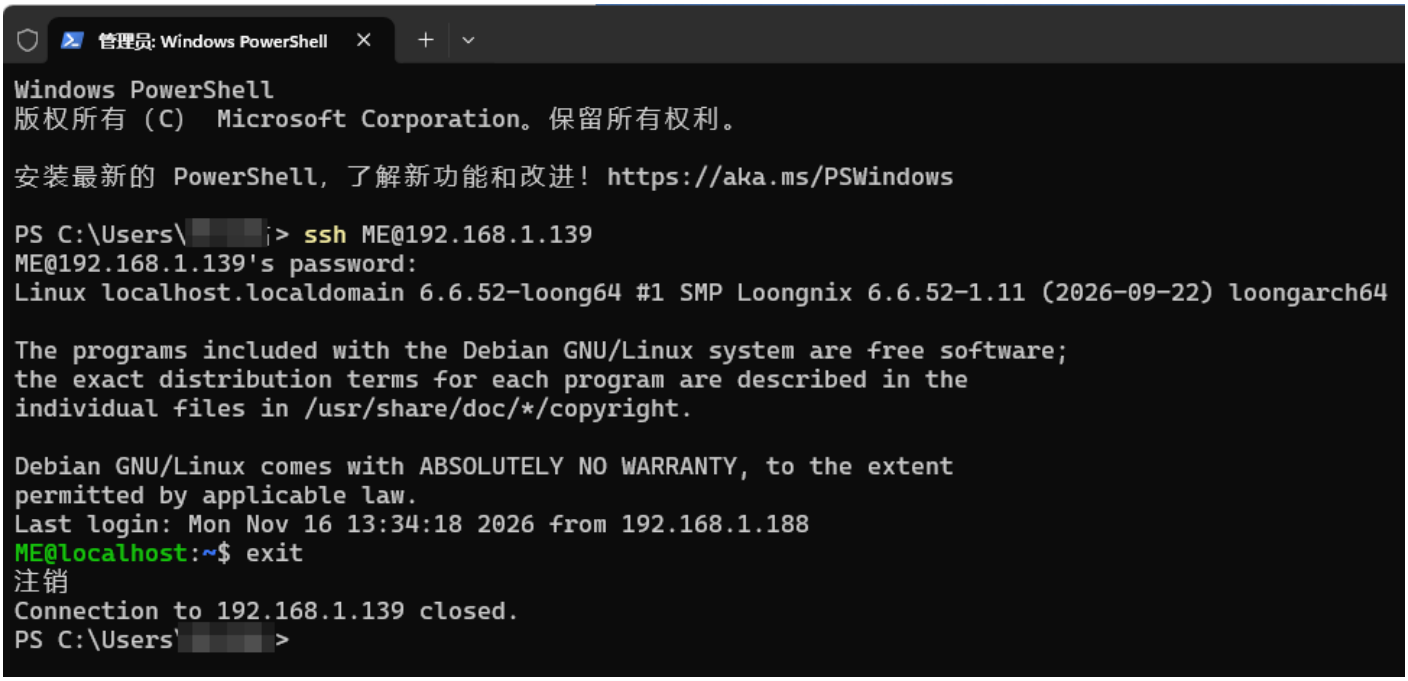

????

?? Unit sshd.service could not be found

???????Debian ? Loongnix ?? `ssh` ??? `sshd` ??? `systemctl status ssh` ?

????????? Permission denied

???????? `root` ?????????? `PermitRootLogin prohibit-password` ?? root ??????????????????????????????? `sudo -i` ?? `root` ???

? ping ?? SSH ???

???????????

```
systemctl is-active ssh
ss -lntp | grep ':22'
```

????????????? 22 ???

```
sudo ufw status
```

??? ufw ????

```
sudo ufw allow 22/tcp
```

????????

`The authenticity of host ... can't be established` ????????????? `yes` ????????? `known_hosts`????????

??? IP ??????????????????????????

```
ssh-keygen -R 192.168.1.139
```

??? SSH ?????

```
sudo systemctl disable ssh
```

?????????????????????????? `sudo systemctl stop ssh` ??????

??

????

```
systemctl status ssh        □□□□□□□
sudo systemctl start ssh    □□□□□
sudo systemctl stop ssh     □□□□□
sudo systemctl restart ssh  □□□□□□□□□□□□□
sudo systemctl enable ssh   □□□□□□□
sudo systemctl disable ssh  □□□□□□□
journalctl -u ssh -n 50     □□□□□ 50 □□□□□□
```

?????

??????????

```
sudo systemctl disable --now ssh
```

?????

```
sudo apt-get purge -y openssh-server
sudo apt-get autoremove -y
```

?????? `/etc/ssh/` ???????????????

```
sudo rm -rf /etc/ssh
```

Revision #1
Created 2026-11-23 10:47:51 CST by xiaoshao
Updated 2026-11-23 10:52:56 CST by xiaoshao